


EB-Z11000



DATASHEET

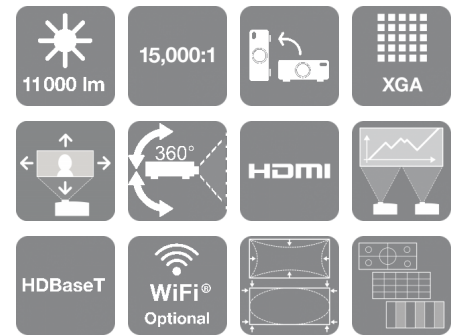

The white EB-Z11000 is an impressive and versatile installation projector, with rental applications, that displays images with 11,000 lumens brightness and in XGA resolution. Able to project portrait aspect images for digital signage, the EB-Z11000 has a flexible installation angle, lens shift for off-centre positioning and plenty of calibration options, with optional Wi-Fi and HDBaseT connectivity.

Clear images and 3LCD technology

At 11,000 lumens the EB-Z11000 is an ultra-bright XGA resolution projector. This projector benefits from Epson's 3LCD technology, which ensures high-quality images with equally high White and Colour Light Output for vivid colours and bright images, even in daylight, and three times brighter colours than competitive projectors¹.

Perfect for large venues

Museums, auditoriums and corporate environments can benefit from the EB-Z11000's large projected image, ideal for making a big impact.

Portrait projection

Able to project portrait aspect images, the EB-Z11000 is ideal for digital signage. Welcome to a whole new way of seeing things; portrait mode is also useful when a venue or event, such a fashion show, doesn't lend itself to landscape projection.

Easy set-up

As well as a flexible installation angle and lens shift for off-centre positioning, the EB-Z11000 includes plenty of calibration options such as edge blending, test patterns and Epson's Super Resolution feature.

Connectivity

The EB-Z11000 includes HDBaseT, which allows up to five connections in one. Optional Wi-Fi is also included for extra flexibility.

Short-throw capability

Great news for auditoriums and lecture theatres; a new and exclusive LU02 short throw lens allows this projector to be positioned closer to the screen.

KEY FEATURES

- **High-brightness**
Ultra-bright at 11,000 lumens
- **Flexible**
Choose different installation angles
- **3LCD technology**
For vivid colours and bright images
- **Connectivity**
HDBaseT and optional Wi-Fi connectivity
- **Portrait projection**
When landscape isn't suitable



PRODUCT SPECIFICATIONS

OPTICAL

Lens Shift	Motorized - Vertical $\pm 56\%$, horizontal $\pm 19\%$
Projection Ratio	1.65 - 2.65:1
Zoom	Motorized, Factor: 1 - 1.61
Projection Size	60 inches - 500 inches
Projection Distance Wide	1.9 m - 16.8 m
Projection Distance Tele	3.2 m - 27.2 m
Projection Lens F Number	1.65 - 2.51
Focal Distance	36 mm - 57.5 mm
Focus	Motorized

TECHNOLOGY

Projection System	3LCD Technology, RGB liquid crystal shutter
LCD Panel	1.03 inch with C2 Fine

IMAGE

Colour Light Output	11,000 lumen-7,300 lumen (economy)
White Light Output	11,000 lumen - 7,300 lumen (economy)
Portrait Colour Light Output	8,500 lm
Portrait White Light Output	8,500 lm
Resolution	XGA, 1024 x 768, 4:3
Contrast Ratio	15,000 : 1
Lamp	380 W, 2,000 h durability, 4,000 h durability (economy mode)
Lamp (portrait mode)	304 W, 1,000 Hours Durability
Keystone Correction	Manual vertical: $\pm 30^\circ$, Manual horizontal $\pm 30^\circ$

CONNECTIVITY

Interfaces	USB 1.1 Type A, USB 2.0 Type B (Service Only), RS-232C, WLAN, Wireless LAN IEEE 802.11b/g/n (optional), VGA in, VGA out, DVI in, HDMI in, Composite in, Component in, BNC in (6x), S-Video in, HDBaseT
------------	--

ADVANCED FEATURES

Security	Kensington lock, Security cable hole
Video Colour Modes	Dynamic, Photo, Presentation, sRGB, Theatre, DICOM SIM

GENERAL

Energy Use	1,060 W, 788 W (economy), 0.37 W (standby)
Product dimensions	741 x 534 x 197 mm (Width x Depth x Height)
Product weight	26 kg
Noise Level	Normal: 40 dB (A) - Economy: 35 dB (A)
Included Software	EasyMP Monitor, EasyMP Multi PC Projection, EasyMP Network Projection

OTHER

Warranty	36 months Carry in or 20,000 h, Lamp: 12 months or 1,000 h Optional warranty extension available
----------	---

LOGISTICS INFORMATION

SKU	V11H606040
EAN code	8715946541228
Dimensions Single Carton	657 x 903 x 364 mm
Carton Weight	33.99 Kg
Country of Origin	Multiple country of origin
Pallet Size Euro	4 Units (1 x 4)
Pallet Size Block	4 Units (1 x 4)



For more information please contact:

Telephone: 01952 607111 (UK)+
01 436 7742 (Republic of Ireland)
E-mail: enquiries@epson.co.uk
Chat: etalk.epson-europe.com
Fax: 0871 222 6740
+ Local call rate.

Web: www.epson.co.uk
www.epson.ie

Trademarks and registered trademarks are the property of Seiko Epson Corporation or their respective owners.
Product information is subject to change without prior notice.

EB-Z11000

WHAT'S IN THE BOX

- Computer cable
- HDMI Cable Clamp
- Power cable
- Remote control incl. batteries
- User's Manual Set

OPTIONAL ACCESSORIES

- Lamp - ELPLP82 - EB-Z9xxx/Z1000xU/Z11xxx (x2)
V13H010L82
- Lamp - ELPLP81 - EB-Z9xxx/Z1000xU/Z11xxx
V13H010L81
- 3D Polarizer - ELPLP01 - G6xxx / 48/4950 /
Z9/11xxx / Z1000xU
V12H618A01
- Adapter - ELPAP07 Wireless LAN b/g/n
V12H418P13
- Ceiling Mount - ELPMB25 Low EB-Z8xxx
V12H003B25
- Ceiling Mount - ELPMB26 High EB-Z8xxx
V12H003B26
- HDBaseT Transmitter - ELPHD01
V12H547041
- Passive 3D Glasses for Child (x5) - ELPGS02B
V12H541B10
- Quick Wireless Connect USB key - ELPAP09
V12H005M09

OPTIONAL LENSES

- Lens - ELPLU02 - EB-Z9xxx/Z1000xU/Z11xxx ST
Off Axis
V12H004U02
- Lens - ELPLL07 - EB-Zxxx Long Throw
V12H004L07
- Lens - ELPLM06 - EB-Zxxx Middle Throw1
V12H004M06
- Lens - ELPLM07 - EB-Zxxx Middle Throw2
V12H004M07
- Lens - ELPLR04 - EB-Zxxx Rear Wide
V12H004R04
- Lens - ELPLW04 - EB-Zxxx Wide
V12H004W04

1. Compared to leading 1-chip DLP business and education projectors based on NPD data, July 2011 through June 2012. Colour brightness (Colour Light Output) measured in accordance with IDMS 15.4. Colour brightness will vary depending on usage conditions. For more information please visit www.epson.eu/CLO

EPSON®